



Walk –Behind Slaw Saws

K2 3000 SLAB SAW SERIES

**K2-3000 series Slab Saws** are big performance saws in small packages. They have been engineered to take advantage of the new breed of high horsepower V-Twin air-cooled engines from Briggs and Stratton and Kohler.



They provide the cutting depth and power of traditional street saws with all the advantages of a smaller, more maneuverable saw.

Model	K2-3024V	K2-3024K
Engine	Vanguard (Gas)	Kohler (Gas)
Power	V-Twin Big Block OHV 35	Command Pro CH980
Blade Capacity	24"	24"
Depth of Cut	9-1/2" (241 mm)	9-1/2" (241 mm)
Weight	650 lbs. (295 kg)	650 lbs. (295 kg)
Model	K2-3030V	K2-3030K
Engine	Vanguard (Gas)	Kohler (Gas)
Power	V-Twin Big Block OHV 35	Command Pro CH980
Blade Capacity	30"	30"
Depth of Cut	12-1/2" (318 mm)	12-1/2" (318 mm)
Weight	650 lbs. (295 kg)	650 lbs. (295 kg)

✉ 23911 Garnier St. #C Torrance, CA 90505 | ☎ 1.800.539.6116 | ✉ K2diamond@sbcglobal.net | ☎ 310.539.5495

# K2 3000 SLAB SAW SERIES

K2-3000 Series Features:	
~	Ergonomic FNR traverse control
~	Quick release, auto latching bayonet mount blade guard
~	1-7/16 blade shaft with heavy duty pillow block bearings
~	Three position adjustable solid steel handle bars
~	Blade guard has garden hose style connector for quick disconnecting
~	Rigid frame front pointer with high visibility guide wheel for accurate tracking
~	Instrumentation includes engine tach, fuel level and hour meter
~	Indicator lights for oil pressure and charging system
~	Depth of cut indicator
~	Valve control for delivery of water to blade guard
~	Saw designed for left or right side mounting of blade and blade guard
~	Blade guard water distribution system designed for optimal blade cooling
~	Front pivot
~	Removable rear and lower front panel for easy service
~	7 3VX V-belt drive from engine to center shaft
~	Hand wheel for positive adjustment of cutting depth
~	Wide front wheel base increases stability and allows ramp loading/unloading
~	Eaton model 6 Hydrostatic transmission coupled to an K2 trans-axle
~	Transmission can be disengaged from axle to allow saw to be pushed manually
~	Travel speed 0-220 FPM forward, 0-100 FPM reverse
~	Neutral start switch to prevent starting with transmission
Made in the U.S.A.	

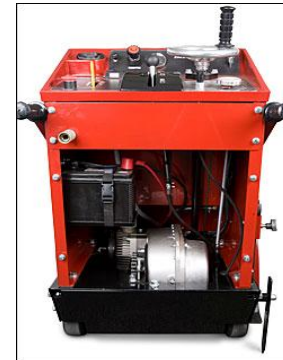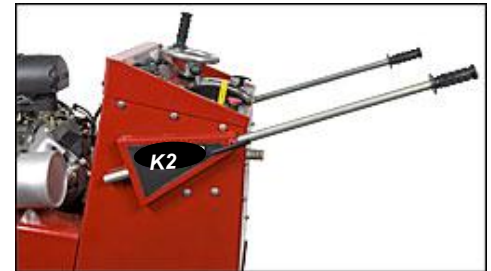

General Specifications	
Blade RPM	1,900
Fuel Capacity	5 gal
Travel Speed	Travel speed 0-220 FPM forward, 0-100 FPM reverse
Starting System	Electric
L x W x H	50" x 29" x 42"
L x W x H (mm)	1,270 x 737 x 1,067
Handle Extension	22" (559mm)

✉ 23911 Garnier St. #C Torrance, CA 90505 | ☎ 1.800.539.6116 | ✉ K2diamond@sbcglobal.net | 📞 310.539.5495